

Technical data

LEO 24GT
preliminary

TEUPEN[®]
...access redefined

since '77

PERFORMANCE

Working height, max.	24,00 m
Platform height, max.	22,00 m
Horizontal outreach, max. (100 kg)	12,80 m
Horizontal outreach, max. (250 kg)	10,20m
Negative outreach, max.	5,00 m
Up and over clearance, max.	9,50 m
Platform capacity, max.	250 kg
Jib, movable	165°
Platform, rotatable	180 °
Turntable rotation, max.	450 °
To be jacked up on ground slope of, max.	16,7 ° / 30,0 %
Track drive, height- and width adjustable	26 / 42 cm
Gradeability, max.	16,7 ° / 30,0 %
Slope angle, max.	16,7 ° / 30,0 %
Travel speed, max.	2,5 km/h

MEASUREMENTS*

Platform (height) (A)	1,10 m
Platform (length) (B)	1,40 m
Platform (width) (C)	0,70 m
Length (D)	6,45 m
Length without platform (E)	6,45 m
Height (F)	1,99 m
With, min. (G)	0,89 m
Ground clearance, max. (H)	0,31 m
Track (length x width (I))	1,50 x 0,23 m
Outrigger:	
■ wide (length) (J) X (width) (K)	4,90 m / 4,70 m
■ narrow (length) (L) X (width) (M)	6,50 m / 2,99 m
■ left or right narrow (width) (N)	3,90 m
■ front or back narrow (length) (O)	5,68 m
Outrigger plate Ø	0,18 m

WEIGHT*


Total weight	2990 kg
Live load in travelling position	3,76 kN/m ²
Live load in working position	1,38 kN/m ²
Point load per outrigger plate, max.	22,50 kN

POWER SOURCES

Standard power sources:	
■ Electric motor	(230 V, 12,9 A, 2,2 kW)
■ Combustion engine (Diesel)	Kubota Z602 (10,8 kW / 14,7 PS)
Fuel tank capacity (Diesel engine)	11,50 l

POWER SUPPLY

Electric current, max.	230 V / 16 A
------------------------	--------------

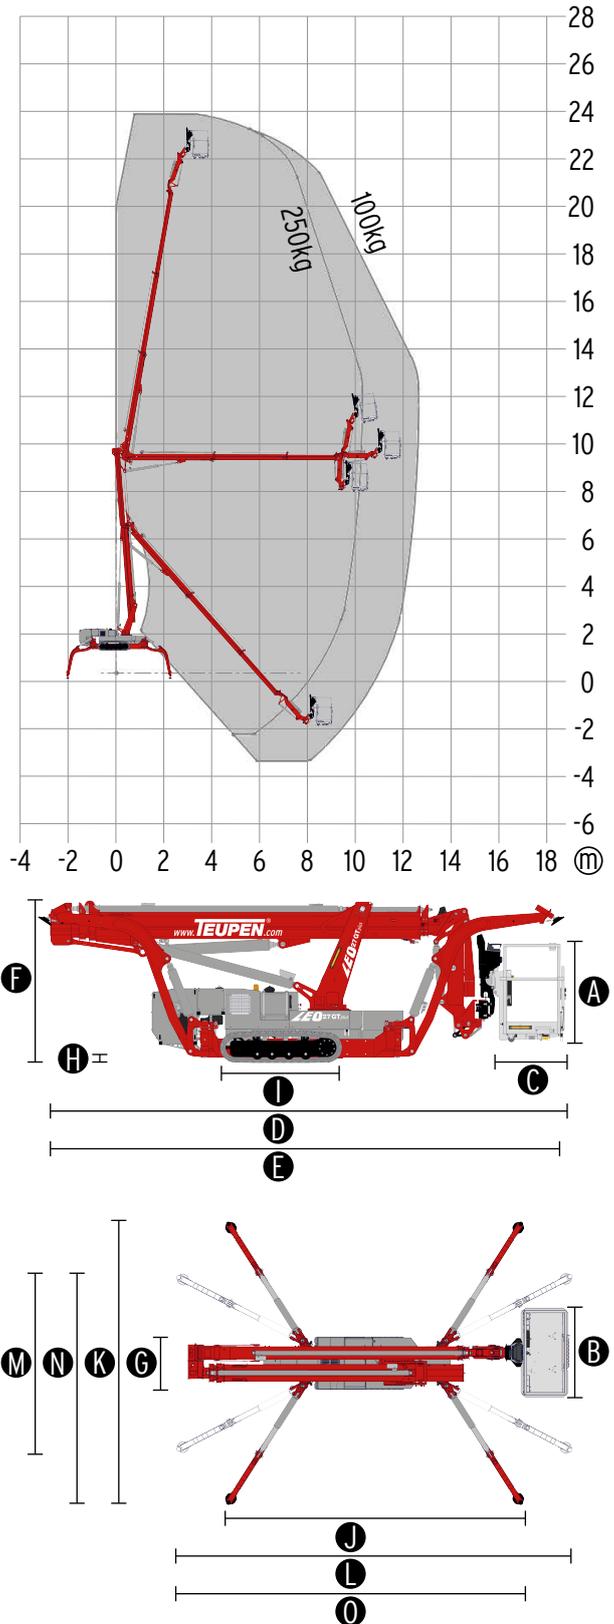

STANDARDS

Harmonised standard DIN EN 280:2016

* The technical data may deviate +/- 3% from the specified values.

* Weight and dimensions may vary depending on options and accessories.

Equipment

LEO 24GT
preliminary

TEUPEN[®]
...access redefined
since '77

CHASSIS

- Powerful track drive with hydraulic braking system
- Precise manoeuvring via sensitive remote control
- Indoor non-marking rubber tracks, with less tread depth the profiles enables smooth travelling
- Hydraulically height- and width adjustable crawler track drive

STABILISATION

- Electrohydraulic stabilisation with automatic levelling and ground pressure sensor system
- Variable Outrigger system
 - wide supported
 - narrowly supported
 - left or right supported
 - front or back supported
- Wear resistant, ant-friction outrigger pads

BOOM SYSTEM

- Telescopic lower and upper boom
- All functions available via radio remote control
- Platform positioning into negative work area up to 5 meters below set up level
- 180° platform rotation for additional flexibility
- Jib movable by 165°
- Platform changing system
- Coming home function - automatic return of the boom into transport position

POWER SOURCE

- Electric motor (230 V, 12,9 A, 2,2 kW)
- Diesel engine Kubota Z602 (10,8 kW / 14,7 PS)
- Start-stop device for combustion engine via radio control

PRODUCTIVITY, SAFETY, QUALITY

- Power socket in the platform (230 V / 16 A)
- USB socket in the control panel (5 V)
- Power socket in the control panel (12 V / 5 A)
- Drive operation without platform possible
- Lockable storage box
- Protected, internal power track for platform
- Hydraulic system filled with biodegradable hydraulic oil
- High quality paint in RAL 3020 (red)
 - Hydraulic cylinders in RAL 9006 (white aluminium)
 - Engine unit & component support in RAL 9006 (white aluminium)
- Unlockable check valved located directly on hydraulic cylinders
- Hydraulic system protected by pressure relief valves
- Hydraulic tank, emergency control, connecting cables and hoses are mounted protected
- Colour display in the control panel
- Additional colour display in the chassis
- TEUPEN Fuzzy V control technology with new intuitive operating concept
- Additional hydraulic drive for boom recovery via platform control

OPTIONS*

- Battery drive (AGM) 48 V, including charging device (as of approx. Q3/2024)
- Battery drive (Lithium) 48 V, including charging device (as of approx. Q3/2024)
- Custom paintwork, one colour, according to RAL-scheme
 - (except metallic coatings, signal- or special colours)
- Custom paintwork, two colours, according to RAL-scheme
 - (except metallic coatings, signal- or special colours)
- Water and air connection, jib

ACCESSORIES*

- Safety harness
- Track mat (2000 x 800 x 15 mm)
- 4 Sliding pads (700 x 220 x 60 mm)
- TOP
- Tree package, including
 - Tree package light - 4 covers, piston rod (outrigger)
- 8 flashlights (outriggers)
- 2 LED headlights (drive unit)
- 3 LED headlights (turntable)
- 4 LED flashlights (platform)
- 2 LED flashlights (underneath the platform, Alu)
- 1 LED headlight (platform)
- Platform (GFK), including platform holder (700 x 700 mm)
 - Attention, machine is not insulated!
 - Platform capacity, max. 158 kg
- Lifting device (300 kg capacity)
- Copper strips, pivot point
- Platform ladder monitoring system with boom function cut-off (Platform, Alu)
- Additional hydraulic drive or boom recovery via platform control

CONTACT

TEUPEN Maschinenbau GmbH
Marie-Curie-Str.13
48599 Gronau
Germany

Phone +49 2562 8161-0
Fax +49 2562 8161-888
E-mail mail@teupen.com

* Weight and dimensions may vary depending on options and accessories

Product specifications are subject to change without notice or obligation. Photographs and drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, expressed or implied. Products and services listed may be trademarks, service marks or trade-names of TEUPEN Maschinenbau GmbH and/or its subsidiaries in the U.S.A. and many other countries. "TEUPEN", "Access redefined" and "LEO Series" are registered Trademarks of Teupen GmbH in the United States of America and many other countries. © 2021 TEUPEN Maschinenbau GmbH.



2024-A_en_EN